

heron™ G

CCD Gun™



General Description

Datalogic is proud to introduce the Heron™ G, the new Datalogic hand-held reader developed to provide high performance with an appealing design. The result is a gun shaped reader that is compact, robust, easy to handle and lightweight. Its simplicity of use and ergonomics make it suitable for retail, commercial and office applications.

The Heron™ G is based on Datalogic's core technology, CCD, which is unsurpassed for reading in retail applications.

The CCD reader is also provided with a green spot (Datalogic patent) guaranteeing good reading feedback directly on the code, which is very useful in noisy environments. A single multi-interface model (Wedge, USB, RS232 and Wand) provides flexibility and full compatibility with the different systems by simply replacing the plug-in cables.

The Heron™ G, like all the Datalogic barcode readers, has undergone a variety of tests to assure that it can withstand daily use in standard operating environments. The tests done in Datalogic's research departments and quality assurance laboratories result in a reader that is long lasting and meets all the requested quality standards in the market.

In addition, Heron™ G reads Reduced Space Symbology (RSS), an emerging symbology that can be printed on smaller labels, meeting emerging market needs for a larger amount of data on a single code.

Features

- > Datalogic "Green Spot"
- > Single multi-interface model: USB, RS232, Wedge and Wand
- > Rugged and reliable
- > Complete set of accessories
- > RSS-14 decoding capability
- > Sunrise 2005 Compliant

Applications

- > Office Automation/Document Handling
- > Manufacturing/Shop Floor
- > Distribution & Retail



CCD Gun™

Specifications

ELECTRICAL CHARACTERISTICS

POWER SUPPLY	5VDC ±5%, directly from the PC	
CONSUMPTION	Max.	180 mA
	Operating mode	155 mA
	Sleep mode	120 uA
	USB suspend mode	350 uA

MECHANICAL CHARACTERISTICS

WEIGHT	195 g (without cable)
DIMENSIONS	173 x 92 x 71 mm
CASE MATERIAL	ABS and Polycarbonate, co-molded rubber
CABLE LENGTH	2 m; USB 1.8 m

PERFORMANCE

LIGHT SOURCE	640 nm visible red LED
SENSOR	CCD solid state (2048 pixels)
SCANNING SPEED	256 scans/sec
READING ANGLE	Pitch ± 75°; Skew ± 70°; Rotation 30°
READING FIELD	See diagram
MAX. RESOLUTION	0.1 mm
BAR CODES READ	RSS, 2/5 family, Code 39 (più Code 32, Cip 39), EAN/UPC, ISBN/ISSN, EAN 128, Code 128, ISBT 128, Code 93, Code 11, CODABAR, IATA, TELEPEN, PLESSEY, Code MSI, Code Delta IBM, Code 16K, Code 49

PCS (min.)	15% (Datalogic Test Chart)	
READING INDICATORS	LED, Good read spot, Beeper	
PROGRAMMING METHOD	<i>Manual</i>	Reading special barcodes
	<i>Automatic</i>	S/W commands through the serial port (with RS232)
	<i>DLsm@rtSet™</i>	Windows configuration program
INTERFACES	RS232, USB, Wedge PC (XT, AT, minidin PS/2) and Wand	

ENVIRONMENT

AMBIENT LIGHT CONDITIONS	Up to 100,000 lux
OPERATING TEMP.	0 °C to 55 °C
STORAGE TEMP.	-20 °C to 70 °C
HUMIDITY	0 to 90% non condensing
DROP RESISTANCE	Resists repeated drops from 1.8 m onto a concrete surface
PROTECTION CLASS	IP30

Accessories



SPC Heron™ G and STD Heron™ G


Stand

The stand for the Heron™ G allows the operator to use it as a presentation scanner.

Desk/Wall Holder

The desk/wall holder permits complete flexibility and ease of use in environments where the work space is extremely limited.

Reading Diagram

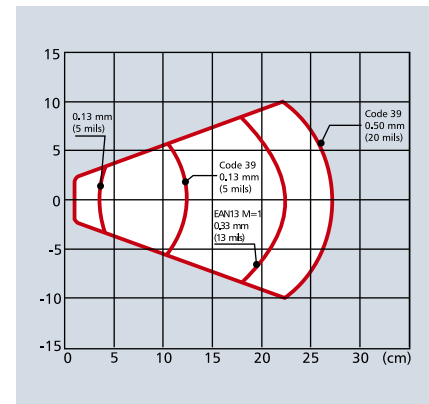

Standard reading area (10° skew angle)



Product and Company names and logos referenced may be either trademarks or registered trademarks of their respective companies. We reserve the right to make modifications and improvements.

Datalogic Scanning, Inc.
Toll free: 1 800 695 5700
International: 1 541 683 5700
E-mail us at: scanning@datalogic.com
www.datalogic.com



R40-0218-US A 0307